


TECHNICAL SERVICE PARTS LIST

OPERATING NOTES:

- Read Operating Instructions Before Use
- Open and Close Slowly
- Maximum Operating Pressure:
200 psi (14 bar)

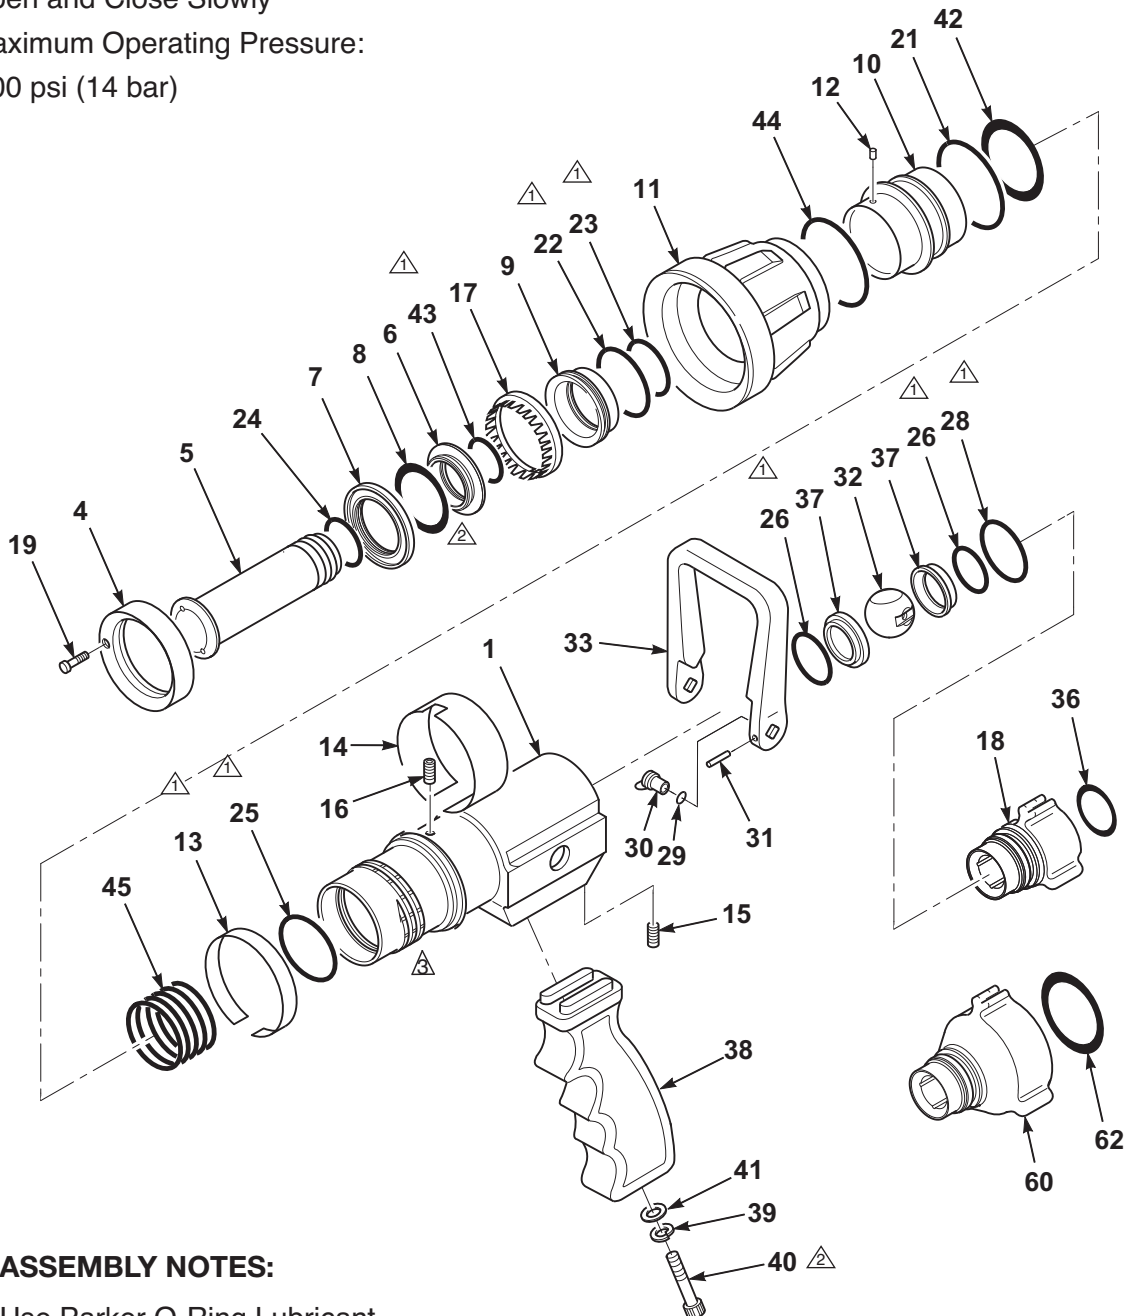

ASSEMBLY NOTES:

- ▲ Use Parker O-Ring Lubricant or equivalent petroleum based lubricant
- ▲ Use Loctite 222 or Permabond LM 113
- ▲ Use Low-Temp Lubriplate



STYLES 1527 and 1528
SaberJet™ Nozzles
TECHNICAL SERVICE PARTS LIST

| ITEM NO. | DESCRIPTION | PART NUMBER | QUANTITY | |
|-----------|------------------------------|-------------|----------|------|
| | | | 1527 | 1528 |
| 1 | Nozzle Body with Pistol Grip | 119315 | | 1 |
| 1 | Nozzle Body 119316 | 1 | | |
| 2† | Bumper Assembly15220011 | 1 | 1 | |
| 4 | Turbine Retaining Ring | 118047 | 1 | 1 |
| 5 | 1½" Tip 119313 | 1 | 1 | |
| 6 | Baffle Head 119314 | 1 | 1 | |
| 7 | Gasket Retainer118056 | 1 | 1 | |
| 8 | Baffle Gasket 717053 | 1 | 1 | |
| 9 | Throat Sleeve 118051 | 1 | 1 | |
| 10 | Throat 118048 | 1 | 1 | |
| 12 | Retaining Pin 744407 | 3 | 3 | |
| 13 | Pattern Band 1527 | 704738 | 1 | |
| 13 | Pattern Band 1528 | 704739 | | 1 |
| 14 | Indicator Band704731 | 1 | 1 | |
| 15 | Socket Head Set Screw | 765008 | 1 | 1 |
| 16 | Socket Head Set Screw | 765083 | 1 | 1 |
| 17* | Turbine Teeth 772160 | 1 | 1 | |
| 18** | Swivel Assembly (2 1/2" NH) | 15260006 | 1 | 1 |
| 18** | Swivel Assembly (1 1/2" NH) | 15230017 | 1 | 1 |
| 19 | Socket Head Cap Screw | 765211 | 2 | 2 |
| 21 | O-Ring 757322 | 1 | 1 | |
| 22 | O-Ring 757323 | 1 | 1 | |
| 23 | O-Ring 757246 | 1 | 1 | |
| 24 | O-Ring 757242 | 1 | 1 | |
| 25 | O-Ring 757400 | 1 | 1 | |
| 26* | O-Ring 757268 | 2 | 2 | |
| 28* | O-Ring 757265 | 1 | 1 | |
| 29* | O-Ring 757269 | 2 | 2 | |
| 30 | Trunnion 107860 | 2 | 2 | |
| 31* | Roll Pin 744062 | 2 | 2 | |
| 32* | Ball 704651 | 1 | 1 | |
| 33 | Handle 721123 | 1 | 1 | |
| 36* | Swivel Gasket 2 1/2" | 717043 | 1 | 1 |
| 36* | Swivel Gasket 1 1/2" | 717042 | 1 | 1\ |
| 37* | Seat 769243 | 2 | 2 | |
| 38 | Pistol Grip 718138 | | 1 | |
| 39 | Lock Washer 784090 | | 1 | |
| 40 | Socket Head Cap Screw | 763064 | | 1 |
| 41 | Flat Washer 784093 | | 1 | |
| 42 | Seal 768223 | 1 | 1 | |
| 43 | O-Ring 757401 | 1 | 1 | |
| 44 | O-Ring 757370 | 2 | 2 | |
| 45 | Spring 768316 | 1 | 1 | |
| Not Shown | Smooth Bore Label | 704732 | 1 | 1 |

* Parts included in Field Service Kit # 9182

** For other threads order by description and thread size (ODM and TPI) or by Akron Thread Code

† A new pattern band item #13 is required



ISO 9001 REGISTERED COMPANY

PHONE: 330.264.5678 or 800.228.1161 | FAX: 330.264.2944 or 800.531.7335 | www.akronbrass.com
 Available in Canada through AKRON MANUFACTURING COMPANY
 PHONE: 519.773.8431 | FAX: 519.773.3794

REVISED 06/07

WARRANTY AND DISCLAIMER: We warrant Akron Brass products for a period of five (5) years after purchase against defects in materials or workmanship. Akron Brass will repair or replace product which fails to satisfy this warranty. Repair or replacement shall be at the discretion of Akron Brass. Products must be promptly returned to Akron Brass for warranty service.

We will not be responsible for: wear and tear; any improper installation, use, maintenance or storage; negligence of the owner or user; repair or modification after delivery; damage; failure to follow our instructions or recommendations; or anything else beyond our control. WE MAKE NO WARRANTIES, EXPRESS OR IMPLIED, OTHER THAN THOSE INCLUDED IN THIS WARRANTY STATEMENT, AND WE DISCLAIM ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. Further, we will not be responsible for any consequential, incidental or indirect damages (including, but not limited to, any loss of profits) from any cause whatsoever. No person has authority to change this warranty.

© Premier Farnell Corporation. 2000 All rights reserved. No portion of this can be reproduced without the express written consent of Premier Farnell Corporation.

A Premier Farnell Company