

STYLE 4802
EN 15182:2019 DATA SHEET

Annex C
(normative)

Datasheet for hand-held branchpipes for fire service use

C.1 General

Note 1: The symbol * means “where applicable” in the whole datasheet.

C.2 General data

Manufacturer	Akron Brass Company
Type	CEN-FLOW
Type according to EN 15182-1:2019, Annex A	EN 15182-2, Type 2
Flowrate settings*	Style 4802 Assault™: 100, 150 lpm
Type of spray*	Hollow cone

C.3 Flow-pressure chart


In the charts, the cone spray types shall be represented by the symbols (or combinations of the symbols) as shown in Figure D.1, where applicable.



Key

- 1 hollow cone spray
- 2 full cone spray
- 3 hollow/full cone spray alternatively
- 4 hollow cone spray combined with narrow spray jet
- 5 hollow cone spray combined with straight jet

Figure D.1-Symbols for spray types

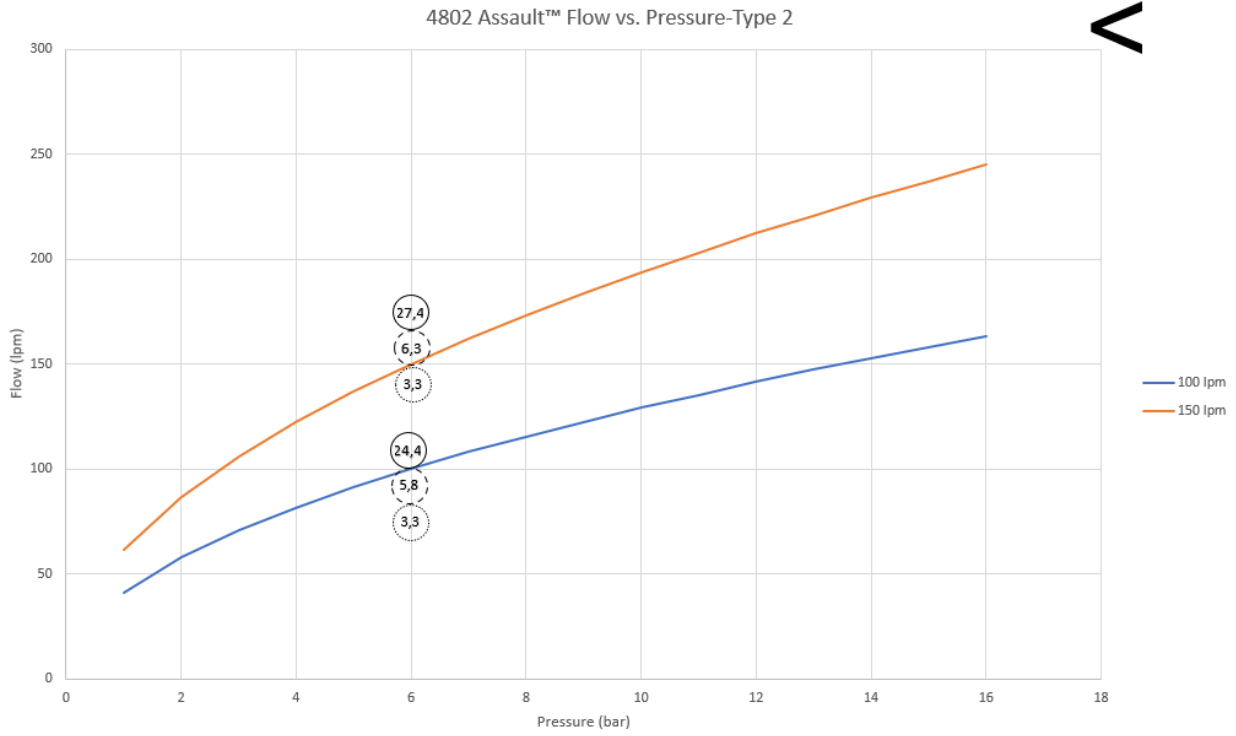

Key

- NN** 1 Straight jet: throw [m] (using a straight line)
- NN** 2 Narrow spray jet: throw [m] (using a dashed line)
- NN** 3 Wide spray jet: throw [m] (using a dotted line)

D.4 Operational devices

Fitting system	Swiveling
Gripping device	Pistol grip
Open/shut-off device*	Ball valve-valve handle
Jet/spray system*	Rotating element
Flow adjustment system*	Rotating element



STYLE 4802, EN 15182:2019 DATA SHEET

D.5 Requirement

	Item	Required by EN 15182-2	Test result
OPERATING AND HANDLING	Dimensions (mm)	≤450 x 300 x 150	217 x 222 x 116
	Mass (kg)	≤3,5	1,5
	Torques needed for moving operating elements (N.m)		
	-Lever*		Not applicable
	-Valve handle*	≤15	6,6
	Flow adjustment element	≤10	N/A
	Jet adjustment element	≤10	1,0
	Rotating inlet element	≤5	3,2
	Flow adjustment* Rotation from minimal to maximal flow	≤180°	N/A
	Jet adjustment* Rotation from straight jet to wide spray jet with a minimal spray angle of 100°	≥70≤180	115°
PERFORMANCE	Effective throw (m)	100 lpm: ≥17.5 150 lpm: ≥21	100 lpm: 24,4 150 lpm: 27,4
	Spray jet*		
	-Wide spray jet*: angle	≥100°	115°
	-Narrow spray jet*: angle	From 30° to 100°	50°
PHYSICS	Sensitivity to frost (°C)	≤-15	-15 Fully operational
	Sensitivity to heat (°C)	≥55	55, Fully operational
	Non-obstruction test (mm)	3,18	3,18 passed through
	Burst pressure (bar)	≥60	60 no burst



STYLE 4802, EN 15182:2019 DATA SHEET

D.6 Optional extra data (no requirements)

Ageing test	
-UV test	1. 720 Hours Carbon Arc Method per NFPA 1964-2013 2. 720 hours in accordance with Table X3.1, Condition 1, of ASTM G 155, <i>Standard Practice for Operating Xenon Arc Light Apparatus for Exposure of Non-Metallic Materials</i> , as required by FM 5511, <i>Approval Standard for Firefighting Nozzles for Use with Hose, Monitor Assemblies and other Firefighting Equipment</i> .
-Ozone test	
Corrosion test	ASTM B 117, <i>Standard for Salt Spray (Fog) Testing</i> , as required by FM 5511, <i>Approval Standard for Firefighting Nozzles for Use with Hose, Monitor Assemblies and other Firefighting Equipment</i> .

WARRANTY AND DISCLAIMER: We warrant Akron Brass products for a period of five (5) years after purchase against defects in materials or workmanship. Akron Brass will repair or replace product which fails to satisfy this warranty. Repair or replacement shall be at the discretion of Akron Brass. Products must be promptly returned to Akron Brass for warranty service. We will not be responsible for: wear and tear; any improper installation, use, maintenance or storage; negligence of the owner or user; repair or modification after delivery; failure to follow our instructions or recommendations; or anything else beyond our control. WE MAKE NO WARRANTIES, EXPRESS OR IMPLIED, OTHER THAN THOSE INCLUDED IN THIS WARRANTY STATEMENT, AND WE DISCLAIM ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. Further, we will not be responsible for any consequential, incidental or indirect damages (including, but not limited to, any loss of profits) from any cause whatsoever. No person has authority to change this warranty. Unless otherwise provided herein. Akron Brass industrial electronic components & the Severe-Duty Monitor have a one (1) year warranty. Select Akron Brass handline nozzles and valves carry a ten (10) year warranty. Weldon products have a two (2) year warranty from date of manufacture (excluding consumable components). Select Weldon LED products carry a five (5) year warranty. Honda products have the manufacturers' warranty and Akron Brass disclaims any warranty in respect of those products.