

1/17/13

PRODUCT NAME:

Enclosed Guide Rollers for Booster Reels

AKRON PART NUMBER:

ERWB-GR-XX-YY-BX and ERWB-GR-XX-YY-BX-LP



PRODUCT DESCRIPTION

Akron Brass is wound up about expanding the available options on Booster Reels. Now there is the option of having an enclosed/box style guide roller to prevent the hose from jumping off the rollers. This new box style guide roller is available in both a low profile and standard configuration. These rollers will work on any of the 16 sizes of both the Electric Rewind and Manual Rewind Booster Hose Reels.

FEATURES

- Chrome plated spools and rollers
- Stainless steel hardware
- Powder coat finish
- 5 year warranty

LIST PRICE (US Dollars, FOB Wooster, OH USA)


ERWB-GR-XX-YY-BX	Box Guide Rollers	\$450.00
ERWB-GR-XX-YY-BX-LP	Low Profile Box Guide Rollers	\$450.00

XX = Disk Diameter

YY = Distance Between Disks

AVAILABILITY

Currently available.

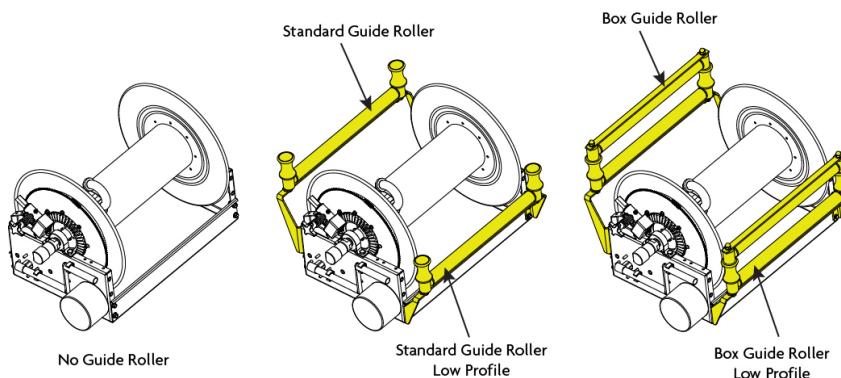

PRODUCT UPDATE

ORDERING GUIDE

MODEL	HOSE CAPACITY		Weight	A	B	C	D	E	F	G	H	J	X	Y
	3/4" (19mm)	1" (25mm)												
ERWB-16-24	125' (38m)	75' (23m)	-	16.00 (406)	24 (610)	8.00 (203)	17.50 (445)	29.83 (758)	34.54 (877)	34.15 (867)	17.57 (446)	9.30 (236)	24.00 (610)	14.25 (362)
ERWB-16-28	150' (46m)	100' (31m)	114 lbs. (52.7 kg)	16.00 (406)	28 (711)	8.00 (203)	17.50 (445)	33.83 (859)	38.54 (979)	38.15 (969)	17.57 (446)	9.30 (236)	28.00 (711)	14.25 (362)
ERWB-22-11	125' (38m)	75' (23m)	-	22.00 (559)	11.50 (292)	10.00 (254)	21.00 (533)	17.00 (432)	21.68 (551)	21.38 (543)	22.41 (569)	11.45 (291)	11.50 (292)	17.75 (451)
ERWB-22-15	175' (54m)	100' (31m)	-	22.00 (559)	15.50 (394)	10.00 (254)	21.00 (533)	21.00 (533)	25.68 (652)	25.38 (645)	22.41 (569)	11.45 (291)	15.50 (394)	17.75 (451)
ERWB-22-20	225' (69m)	150' (46m)	115 lbs. (52.1 kg)	22.00 (559)	20.00 (508)	10.00 (254)	21.00 (533)	25.50 (648)	30.18 (767)	29.88 (759)	22.41 (569)	11.45 (291)	20.00 (508)	17.75 (451)
ERWB-22-24	300' (92m)	200' (61m)	-	22.00 (559)	24.00 (610)	8.00 (203)	21.00 (533)	29.85 (758)	34.31 (871)	34.23 (870)	22.41 (569)	11.45 (291)	24.00 (610)	17.75 (451)
ERWB-22-28	350' (107m)	225' (69m)	-	22.00 (559)	28.00 (711)	8.00 (203)	21.00 3 (533)	3.85 (860)	38.31 (973)	38.23 2 (971)	2.41 (569)	11.45 (291)	28.00 (711)	17.75 (451)
ERWB-24-11	150' (46m)	100' (31m)	-	24.00 (610)	11.50 (292)	10.00 (254)	25.00 (635)	17.00 (432)	21.68 (551)	21.38 (543)	27.04 (687)	15.08 (383)	11.50 (292)	21.75 (553)
ERWB-24-15	225' (69m)	125' (38m)	-	24.00 (610)	15.50 (394)	10.00 (254)	25.00 (635)	21.00 (533)	25.68 (652)	25.38 (645)	27.04 (687)	15.08 (383)	15.50 (394)	21.75 (553)
ERWB-24-20	300' (92m)	175' (54m)	117 lbs. (53 kg)	24.00 (610)	20.00 (508)	10.00 (254)	25.00 (635)	25.50 (648)	30.18 (767)	29.88 (759)	27.04 (687)	15.08 (383)	20.00 (508)	21.75 (553)
ERWB-27-11	225' (69m)	150' (46m)	114 lbs. (52.7 kg)	27.50 (699)	11.50 (292)	10.00 (254)	25.00 (635)	17.00 (432)	21.68 (551)	21.38 (543)	28.79 (731)	15.08 (383)	11.50 (292)	21.75 (553)
ERWB-27-15	300' (92m)	200' (61m)	116 lbs. (52.6 kg)	27.50 (699)	15.50 (394)	10.00 (254)	25.00 (635)	21.00 (533)	25.68 (652)	25.38 (645)	28.79 (731)	15.08 (383)	15.50 (394)	21.75 (553)
ERWB-27-20	400' (122m)	250' (77m)	-	27.50 (699)	20.00 (508)	10.00 (254)	25.00 (635)	25.50 (648)	30.18 (767)	29.88 (759)	28.79 (731)	15.08 (383)	20.00 (508)	21.75 (553)
ERWB-29-11	250' (77m)	175' (54m)	-	29.00 (737)	11.50 (292)	10.00 (254)	25.00 (635)	17.00 (432)	21.68 (551)	21.38 (543)	29.54 (750)	15.08 (383)	11.50 (292)	21.75 (553)
ERWB-29-15	350' (107m)	225' (69m)	-	29.00 (737)	15.50 (394)	10.00 (254)	25.00 (635)	21.00 (533)	25.68 (652)	25.38 (645)	29.54 (750)	15.08 (383)	15.50 (394)	21.75 (553)
ERWB-29-20	450' (138m)	300' (92m)	-	29.00 (737)	20.00 (508)	10.00 (254)	25.00 (635)	25.50 (648)	30.18 (767)	29.88 (759)	29.54 (750)	15.08 (383)	20.00 (508)	21.75 (553)

NOTES:

1. When installing guide rollers ERWB-GR, Add 4-1/2" to "D" dimension.
2. The "G" dimension is for 1/3 HP motors. Add 2" for 1/2 HP motors. Reels handling 200' or more must use 1/2 HP motor.
3. Reels can be supplied with 1/3 HP And 1/2 HP motors in 12V or 24V.
4. A flexible connector must be used between the inlet pipe and the inlet swivel joint.
5. For manual rewind reels, use prefix "MRWB" in place of "ERWB".
6. Additional configurations are available upon request.