

# 1 1/2" Swing-Out Valve (Body Only) with stainless ball

## STYLE 8815

Self-locking heavy-duty apparatus valve with a stainless steel ball designed for the harsh realities of today's fire service when water contaminants challenge a valve's sealing capabilities. This valve features the following:

- A single valve body that will accept a variety of actuators
- HydroMax TM technology: A patented ball geometry providing performance never seen before in swing-out apparatus valves  
Actuator options:
- R1
- TS/TSC

Find a distributor near you if you're interested in these apparatus valves.

## Features


- 1 1/2" waterway
- 107° handle travel
- 316 stainless steel ball for longer valve life
- High quality brass body
- Improve sealing & increased gating ability
- Flow optimization reduces turbulence while in the gated position and requires lower operating forces
- No lubrication or regular maintenance required
- Simple two-seated design (no O-Rings to cut or lose during assembly or maintenance)
- Wide range of available adaptors
- Designed and tested to exceed NFPA requirements
- Cast, machined and assembled at our facilities in Wooster, Ohio  
Handle options:
- TS
- TSC
- R1

## Applications/Solutions

- Fire OEMs





## Specifications

Style	8815
Warranty	
Type	Heavy-Duty
Material	Brass
Brand	Swing-Out
Length	2 1/4" (57 mm)
Internal Diameter	1 1/2" (38 mm)

# 1 1/2" Swing-Out Valve (Body Only) with stainless ball

STYLE 8815

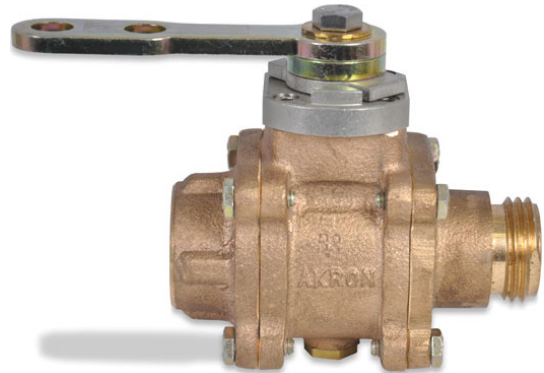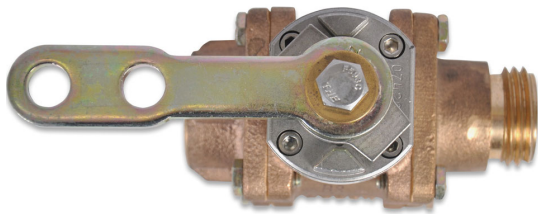

Stainless Steel Ball

