

## 2 1/2" Generation II Swing-Out Valve (Body Only) with polymer ball

### STYLE 8925

Heavy-duty valve with a polymer ball designed for the harsh realities of today's fire service when water contaminants challenge a valve's sealing capabilities. This valve features the following:

- A single valve body that will accept a variety of actuators
- HydroMax technology: A patent-pending ball geometry providing performance never seen before in swing-out valves

Actuator/handle and adapters not included in price.

### Features

- 2 1/2" waterway
- 90° handle travel
- Polymer ball
- High quality brass body
- Improve sealing & increased gating ability
- Flow optimization reduces turbulence while in the gated position and requires lower operating forces
- No lubrication or regular maintenance required
- Simple two-seated design (no O-Rings to cut or lose during assembly or maintenance)
- Wide range of available adapters (see valve guide for adapter options)
- Designed and tested to exceed NFPA requirements
- Cast, machined and assembled at our facilities in Wooster, Ohio

Actuator options:


- R1
- TS/TSC
- SZ
- Electric
- Manual Gear
- Rack and Sector

Actuator/handle and adapters not included in price.

### Applications/Solutions



### Specifications


Style	8925
Warranty	
Type	Heavy-Duty
Material	Brass
Brand	Swing-Out
Length	3 1/2" (89 mm)
Inlet	2 1/2" (65 mm)

- Fire OEMs

# 2 1/2" Generation II Swing-Out Valve (Body Only) with polymer ball

STYLE 8925

R-1

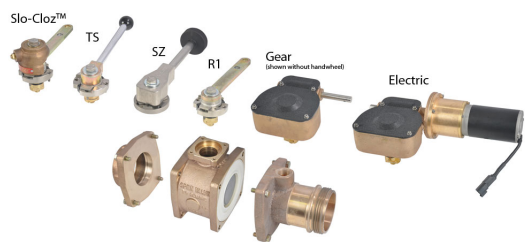

TS



TSC

