

School Bus Warning Light, Halogen, Amber, Body Ground

STYLE 1080-1100-20




- Original vehicle warning light equipment for major school bus builders
- Body ground (-1100) or wire ground (-1106) versions
- Flat-back design allows the school bus lights to be surface mounted (no clearance holes to cut) and provides a large gasketed sealing area to vehicle
- Utilizes standard H3-55W bulb

Contact a distributor today if you're interested in learning about our school bus safety lighting products.

Features

These 7" diameter school bus lights surface mount to a vertical, planar vehicle surface using 4 customer supplied #8 or #10 screws on a 6.25" bolt circle. The warning light includes a 10mm thick closed cell foam pad that compresses to seal between the lamp body and the mounting surface. Wire exit into the vehicle must be placed so that lead wires can pass directly from the lamp through the mounting surface without being pinched. All holes for passing wires must use a protective grommet.

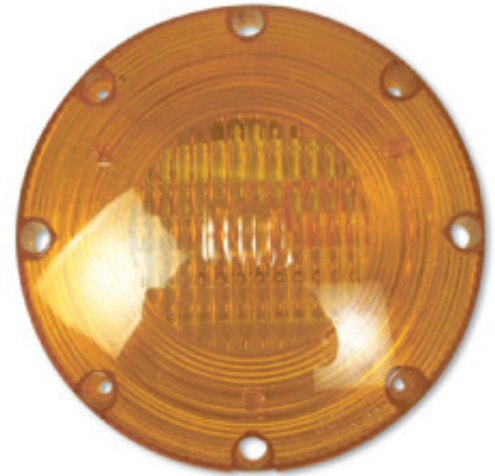

Specifications

Style	1080-1100-20
Country of Manufacture	
Depth	2.0 in (50.8 mm)
Diameter	7 in (178 mm)
Carton Quantity	36
Wattage	55
Volts	12.8
Amperage	4.6

School Bus Warning Light, Halogen, Amber, Body Ground

STYLE 1080-1100-20

The lamp complies with SAE J887 and all associated weathering tests as required by FMVSS108 for pupil warning lamps. An H3-55W halogen bulb along with a metalized reflector and specific optical lens combine to meet the photometric requirements of J887. Lamp mounting torque is recommended from 12 to 20 in-lbs. Exceeding 20 in-lbs can deform the lamp's steel housing and create a leak path.