

# School Bus Warning Light, Halogen, Amber, Ground Wire

**STYLE 1080-1106-20**




Akron Brass' original school bus lights for major school bus builders provide visibility and safety to your school bus fleet. This bus light's flat-back design allows surface mounting and gives a large gasketed sealing area – no need to cut clearance holes. This amber bus light utilizes a standard H3-55W bulb and is available with Amber (-10) or amber (-20) lenses.

Contact a distributor today if you're interested in learning about our school bus safety light products.

## Features

- 7" diameter lamps surface mount to a vertical, planar vehicle surface -
- Uses 4 customer-supplied #8 or #10 screws on a 6.25" bolt circle - 10mm thick closed cell foam pad that compresses to seal between the lamp body and the mounting surface. - Utilizes standard H3-55W bulb - Available in Amber (-10) or amber (-20) lens versions - Complies with SAE J887 and all associated weathering tests

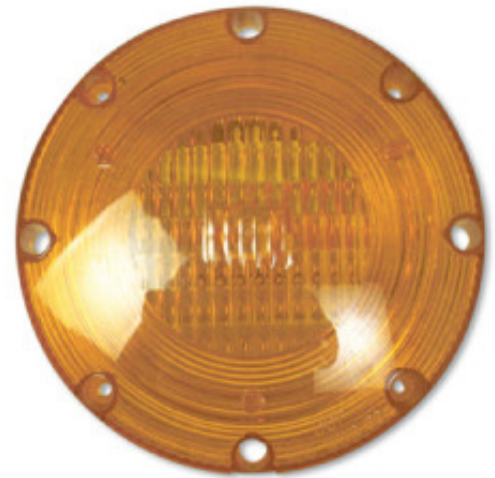

## Specifications

Style	1080-1106-20
Country of Manufacture	
Depth	2.0 in (50.8 mm)
Diameter	7 in (178 mm)
Carton Quantity	36
Wattage	55
Volts	12.8
Amperage	4.6

**1.800.228.1161 | [www.weldoninc.com](http://www.weldoninc.com) | [weldoncare@idexcorp.com](mailto:weldoncare@idexcorp.com)**

Copyright 2024 Akron Brass Company. All rights reserved. No portion of this can be reproduced without the express written consent of the Akron Brass Company. (03/24)

# School Bus Warning Light, Halogen, Amber, Ground Wire

## STYLE 1080-1106-20

The lamp complies with SAE J887 and all associated weathering tests as required by FMVSS108 for pupil warning lamps. An H3-55W halogen bulb along with a metalized reflector and specific optical lens combine to meet the photometric requirements of J887. Lamp mounting torque is recommended from 12 to 20 in-lbs. Exceeding 20 in-lbs can deform the lamp's steel housing and create a leak path.